

Another vision of security

No AC power. Operates for months on one set of batteries. VIDEOFIED™ marks a real turning point in the alarm systems market!

- > Immediate installation without wires or power
- > Video of alarm sent over the cellular network
- > Affordable, Portable, Anywhere

Outdoor camera

Indoor camera




A detector that makes A DIFFERENCE

VIDEOFIED™ guarantees peace of mind and respect for your privacy.



TOTALLY Wireless GPRS Cellular Network Video Security System

Self Powered

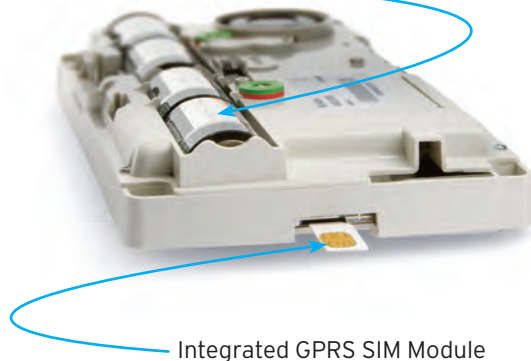

Integrated GPRS SIM Module

- > Operates for months on a set of batteries
- > Up to 24 cameras
- > 24 x 7 monitoring
- > All Weather
- > From -20°/+60°C (-10°/+140°F)
- > IP65 Rated

- > On detection, the wide-angle camera records a 10 second video.
- > The video is sent to the monitoring station.
- > The monitoring agents can watch the video of the intrusion in real time, eliminating uncertainty!
- > In cases of intrusion or real danger, the monitoring station calls the police.



More convenient because it's wireless!

The panel may be connected to a standard telephone line or use the GPRS cellular network (via an integrated module). Each device in the system, including panel, is powered by batteries with a 4-year operating capacity. No AC power required. Thanks to the simplicity of this wireless system, one person can install a full system in just 2 hours.



Patented Technology

- > **Power supply:** each device in the system is powered by batteries. The panel and the peripherals are not connected to an external power source.
- > **Alarm reporting:** to monitoring station via IP, phone, or cell network.
- > **Integrated Camera, Motion Sensor, Night-vision Illuminators provide true night vision in total darkness:** with the illuminators we are NOT 0.2 lux. This is only a camera spec and irrelevant for illuminated systems.

Technical characteristics

RF technology	Wiselink
Radio type	Bi-directional
Frequency bands	868/915/920 MHz
Transmission	AES encryption
Video format	MPEG
Video size	200 KB
Video Frame Rate	5 per second
Resolution	JPEG
Image size	320 x 240 pixels
Operating temperature	
Indoor camera:	0°/+40°C (32°/+104°F)
Outdoor camera:	-20°/+60°C (-10°/+140°F)

Humidity	
Indoor camera:	70% max
Outdoor camera:	IP65
Certifications UL/FCC/CENELEC/CE/EN50131/EN300220/INCERT/IDA/NCP/A-TICK	
Illuminators	High intensity infrared LED
Night vision	
Indoor camera:	5 m / 14 ft.
Outdoor camera:	12 m / 40 ft.
Detection	passive infrared with signal analysis
Detection distance	12 m / 40 ft.

Applications

Protects everything everywhere: homes, businesses, fuel tanks, relay towers, electrical transfers, air conditioning units, construction sites, marinas, motor homes...



For more information
contact Downs Protection
07 4633 1112
info@downsprotection.com.au

