


KOBI 540tvl Mini Bullet Camera

KOBI CAM78




FEATURES



CAM78

1/3" Super Hi-Res. Color Camera
 Sony HQ1, 540TVL, 0.15Lux@F2.0
 Built-in DNR & Sense Up
 Built-in Board Lens
 Water Resistance:IP67

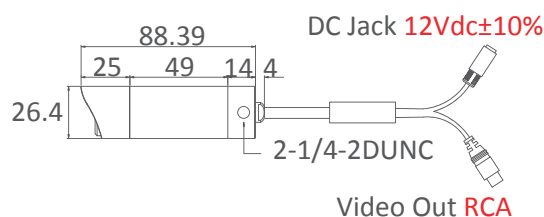

Tol:±0.5 Unit:mm

SPECIFICATIONS

CAM78		
TV System	PAL	NTSC
Image Sensor	1/3" Sony Super HAD CCD II	
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)
Resolution ; DSP	540TVL ; Sony HQ1	
Minimum Illumination	0.15Lux@F2.0	
Video Output ; Connector	1.0Vp-p Composite, 75Ω (RCA, Attach BNC Connector)	
Signal to Noise Ratio	More than 48dB	
Gamma Correction	0.45	
Synchronizing System	Internal	
Automatic Electronic Shutter	Automatic, 1/50(60)~1/100,000 sec.	
Automatic Gain Control	Automatic	
Automatic White Balance	Automatic	
Back Light Compensation	NA	
Flickerless	NA	
DNR ; Sense Up	Automatic Dynamic Digital Noise Reduction (DNR) ; Automatic	
Digital Day&Night Mode	Automatic (B/W Mode<2Lux, Color Mode>5Lux)	
Automatic IRIS ; Connector	NA	
Adjustment VR	NA	
Lens Mount	Built-in Board Lens	
Lens, Angle of View(H)	Standard:f3.6mm/F2.0/72.5° on:f8.0mm/36.5°, f12.0mm/24.5°	
Water Resistance	IP67	
Max. Breaking Strength	NA	
Power Supply ; Consumption	12Vdc±10% ; 1.6W	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C	
Operation ; Storage Humidity	Maximum:RH80% ; RH90%	
Dimensions	26.4(DIA)x83.39(D)mm	
Net Weight	100g	
Accessories Option (Page)	Bracket:Standard with MTB-204	

For more information
 contact Downs Protection
07 4633 1112
info@downsprotection.com.au

