



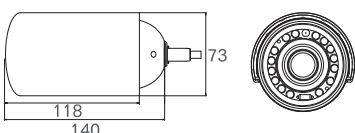

Vari-Focal IR Tube Camera



FEATURES

CAM74IRHR

Image Sensor
DSP
Picture Elements
Horizontal Resolution
Minimum Illumination
Lens
IR Distance
IR LED
Scanning System/ Sync System
Electronic Shutter
White Balance
Auto Gain Control
S/N Ratio
Video Output Signal
Operating Temp.
Power Consumption
Dimensions
Water Resistance

SPECIFICATIONS

K-32HCVF

1/3" SONY Super HAD II CCD
SONY HQ1 DSP
PAL: 795(H) x 596(V)
540 TV Lines
0.5 Lux @ F1.2 with IR Off, 0 Lux with IR On
2.9-10mm Vari-focal Aspherical Auto Iris Lens
Up to 8m
15 IR LEDS
2:1 Interlace / Internal
AES Mode (On/Off) 1/50 (1/60) - 1/100000 Sec
Automatic
Automatic
More than 50dB (AGC Off)
Composite BNC Output 1.0Vp-p at 75 Ohm
-10°C -- +50°C
12VDC 350mA
73mm (W) x 185mm (L)
IP67

For more information
contact Downs Protection
07 4633 1112
info@downsprotection.com.au

